


2 INCH MONITORING STATIONS

- Terminals on the outside of the lid provide fast, convenient test checks.
- Available with pre-wiring to outside terminals in the lid. One red and one black 15' coil of plastic coated, #12 AWG type THW, 600 volt, oil resistant solid copper wire is contained in the station.
- Wires easily uncoil to reach connection points.
- Stations with terminals but no wires is available.
- The 15" plastic box has a 2 $\frac{3}{8}$ " I.D. and is available in either straight or flanged top for installation at grade level.
- Available in a SUPERIOR GRADE ABS or an ECONOMICAL High Impact Poly Styrene. Either choice of plastics is long lasting and will not rust, rot, or corrode.
- Adjustable to grade test stations are available upon request.
- Boxes are flared and squared to prevent pull-out, turning, or settling.
- Cast iron lids are marked "Test 1 2".
- You may order custom lids for an additional charge.
- A permanent "Real" magnet is in every box for easy location with electronic locator.
- Monitor lids available in marker posts. See marker post spec sheet to order.
- Underground installation protects the station from vandalism and is esthetically superior. However, above ground monitor stations are also available.

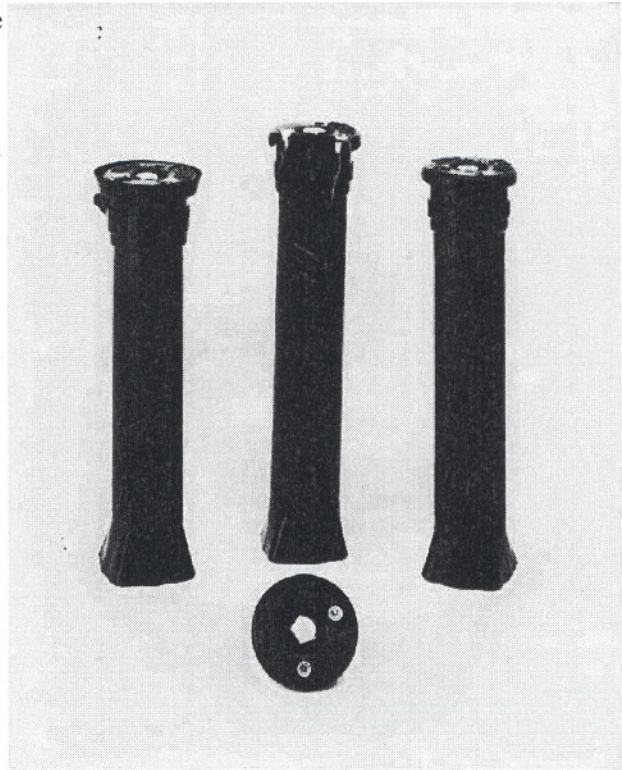

HANDLEY INDUSTRIES, INC.**HOW TO ORDER SUPERIOR GRADE
2" MONITORING STATIONS**

Choose from the following categories to build the monitoring station best suited to your personal needs.

ALL monitoring stations begin with **M2**.... continue to build your model number from the following categories:

M2

ONE = UPPER TUBE TYPE F = Plastic Flange Top S = Straight Top Flange	TWO = WIRE N = Not Wired W = Wired	THREE = LID COLOR (Black is Standard) A = Yellow	FOUR = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group One, Code F)
FIVE = ARCHES AND TELESCOPING BOX (A 15" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping Box, 18 ⁵ / ₈ " - 24", Without an Arch, Flared R = Telescoping Box, 18 ⁵ / ₈ " - 24", With an Arch			

HANDLEY INDUSTRIES, INC.**HOW TO ORDER ECONOMY LINE
2" MONITORING STATIONS**

Choose from the following categories to build the monitoring station best suited to your personal needs.

ALL economy line monitoring stations begin with **EM2**.... continue to build your model number from the following categories:

EM2

ONE = UPPER TUBE TYPE F = Plastic Flange Top S = Straight Top Flange	TWO = WIRE N = Not Wired W = Wired	THREE = LID COLOR (Black is Standard) A = Yellow	FOUR = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group One, Code F)
FIVE = ARCHES AND TELESCOPING BOX (A 14" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping Box, 17¼" - 22", Without an Arch, Flared R = Telescoping Box, 17¼" - 22", With an Arch			

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.