


HANDLEY INDUSTRIES, INC.**2 INCH CATHODIC TEST STATIONS**

- The 15" ABS plastic box has a 2³/₈" I.D. and is available in either straight or flanged top for installation at grade level.
- Available in a SUPERIOR GRADE ABS or an ECONOMICAL High Impact Poly Styrene. Either choice of plastics is long lasting and will not rust, rot, or corrode.
- "Adjustable to grade" test stations are available upon request.
- Terminal blocks are secured in place beneath the lid. Wires are automatically pulled up when the lid is removed.
- 0, 1, 2, or 5 terminals are available.
- All terminals are made of solid brass.
- Boxes are flared and squared to prevent pull-out, turning or settling.
- Cast iron lids are marked "Test". Plastic lids are marked "Test Station" and include a metal reflector for locating.
- One piece locking lids are standard. No parts to lose.
- You may order custom lids for an additional charge.
- A permanent "Real" magnet is in every box for easy location with electronic locator.
- Terminal Jumpers are available upon request.
- Test terminals can be incorporated with Handley valve boxes.
- Underground installation protects the station from vandalism and is esthetically superior. However, above ground test stations are also available.
- Test lids are available for marker posts. See marker post spec sheet to order.

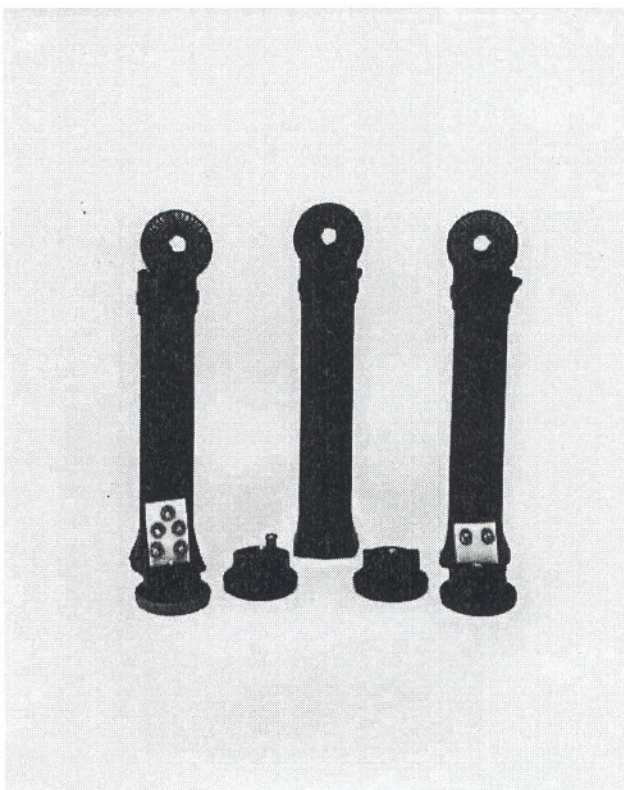

HANDLEY INDUSTRIES, INC.**HOW TO ORDER SUPERIOR GRADE 2" CATHODIC TEST STATIONS**

Choose from the following categories to build the test station best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing.

ALL test station model numbers begin with **T2**.... continue to build your model number from the following categories:

T2

ONE = LID MATERIAL I = Iron P = Plastic	TWO = UPPER TUBE TYPE C = Plastic Flange Top with Iron Collar F = Plastic Flange Top H = Iron Heavy-Duty Flange Top S = Straight Top Flange	THREE = NUMBER OF TERMINALS 0 = 0 Terminals on a 2-Hole Board 1 = 1 Screw-(Terminal)-Type Terminal on a Board 2 = 2 Screw-(Terminal)-Type Terminals on a Board 3 = 1 Screw-(Terminal)-Type Terminal in the Wedge Nut 4 = 0 Terminals on a 5-Hole Board 5 = 5 Screw-Type Terminals on a Board 6 = 0 Terminals and No Terminal Board 7 = 1 Terminals in the Lid 9 = 5 Screw-Type Terminals on a Round Board
FOUR = LID COLOR (Black is Standard) A = Yellow D = Red B = Blue E = White C = Green F = Orange	FIVE = JUMPER 1 = One Jumper 2 = Two Jumpers	SIX = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group Two, Code F)
SEVEN = MAGNET (One Magnet Located in the Tube is Standard) M = No Magnet At All N = One Magnet in the Wedge Nut (None on the Tube) P = Two Magnets in the Wedge Nut (None on the Tube)		EIGHT = TUBE DESIGN (15" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping, 18 3/8" - 24", Flared R = Telescoping, 18 5/8" - 24", Arched

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.

HANDLEY INDUSTRIES, INC.

HOW TO ORDER ECONOMY LINE 2" CATHODIC TEST STATIONS

Choose from the following categories to build the test station best suited to your personal needs. Many options are available so please look this over closely, we don't want you to miss a thing.

ALL economy line test station model numbers begin with **ET2**.... continue to build your model number from the following categories:

ET2

<p>ONE = LID MATERIAL I = Iron P = Plastic</p>	<p>TWO = UPPER TUBE TYPE C = Plastic Flange Top with Iron Collar F = Plastic Flange Top H = Iron Heavy-Duty Flange Top S = Straight Top Flange</p>	<p>THREE = NUMBER OF TERMINALS 0 = 0 Terminals on a 2-Hole Board 1 = 1 Screw-(Terminal)-Type Terminal on a Board 2 = 2 Screw-(Terminal)-Type Terminals on a Board 3 = 1 Screw-(Terminal)-Type Terminal in the Wedge Nut 4 = 0 Terminals on a 5-Hole Board 5 = 5 Screw-Type Terminals on a Board 6 = 0 Terminals and No Terminal Board 9 = 5 Screw-Type Terminals on a Round Board</p>
<p>FOUR = LID COLOR (Black is Standard) A = Yellow D = Red B = Blue E = White C = Green F = Orange</p>	<p>FIVE = JUMPER 1 = One Jumper 2 = Two Jumpers</p>	<p>SIX = VENT HOLE L = One 3/8" Vent Hole (Mandatory for Group Two, Code F)</p>
<p>SEVEN = MAGNET (One Magnet Located in the Tube is Standard) M = No Magnet At All N = One Magnet in the Wedge Nut (None on the Tube) P = Two Magnets in the Wedge Nut (None on the Tube)</p>		<p>EIGHT = TUBE DESIGN (14" Straight Tube, Flared at the Bottom is Standard) Q = Telescoping, 17¼" - 22", Flared R = Telescoping, 17¼" - 22", Arched</p>

FOR OTHER OPTIONS OR VARIATIONS, PLEASE CONSULT THE FACTORY.